


TRS Studiotechnik GmbH, Am Exer 27, D-38302 Wolfenbüttel,
FON (+49) 5331 / 9749-0, FAX (+49) 05331 / 9749-44
www.trs-studiotechnik.de email: info@trs-studiotechnik.de

Carrier board TP 600

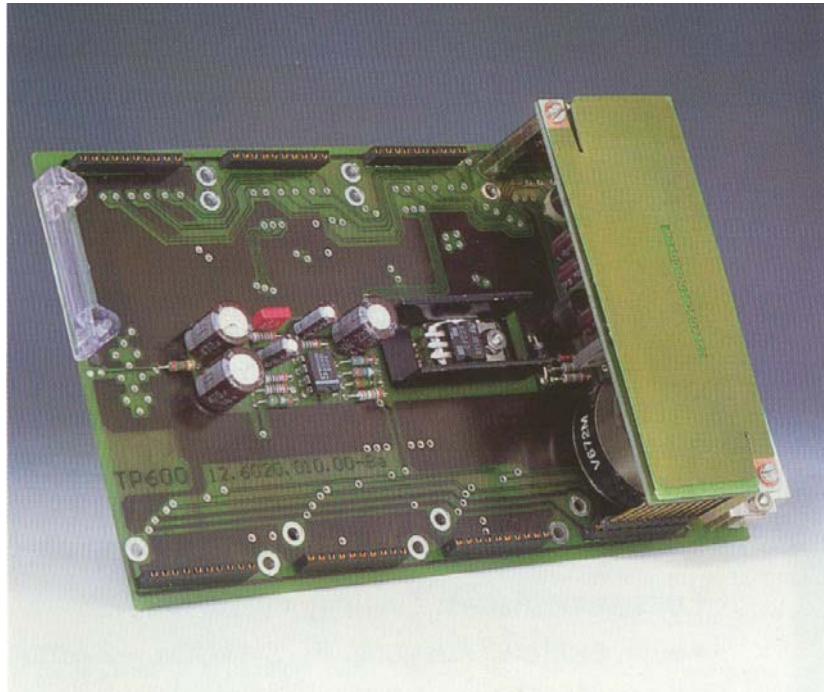

Specifications

Carrier board TP 600

General information:


On the carrier board TP 600 can be mounted up to 4 pieces of the modular amplifier system MVS.

The voltage supply of the module effected from the filter circuit on the board.

- Up to 4 places for modular amplifiers
- Operating voltage 24V

Please take further technical data from the data sheet.

For example TP 600 as V682M-7

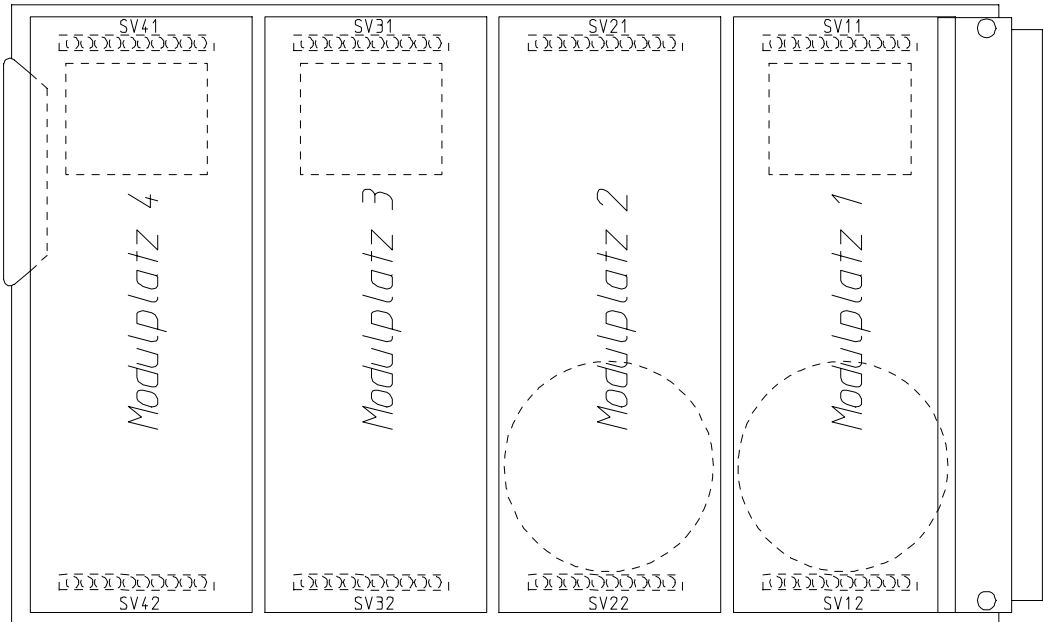

V 682M

V 682M

V 682M

V 672M

Dimensions

Eurosize 100 mm x 160 mm
Board width 8TE (40 mm)

Connector

96pol VG male-connector, DIN 41612, Size C

Powersupply

24V -10 %, +15%

Current consumption

20mA without, with module max. 1A (FuseT1A)

Weight

100 g without module

Modul places

4

Temperture note

-10°C bis +60°C

Block and Connection diagram TP 600

